

## DSC1000-5

## High Performance Single Stage Power Line Filter

### DSC1000-5 16A CHASSIS MOUNT FILTER

ROHS COMPLIANT

#### SPECIFICATIONS

Operating Freq.	: 50/60Hz
Usable Freq.	: DC - 400Hz
Max. Operating Voltage	: 300V +10%
Rated Current	: 16A
Ambient Temperature	: -25 to 40C
Climatic Category	: 25/100/21
Hipot Rating (L-G)	: 2700VDC
Terminals (-T)	: QD: 0.25 Tabs
Safety Approvals	: cURus, EN60939
Typ. Weight, LBS (KG)	: 0.8 (0.4)

#### TYPICAL INSERTION LOSS, dB (50/50ohm)


FREQ (MHz)	.15	.5	1.0	10	30
CM(dB)	38	60	65	50	50
DM(dB)	28	48	60	60	60

#### PART NUMBER/ ORDERING


DSC1000-5	-Y (Ycap, nF)	-T	LK, mA 120V/60Hz 250V/60Hz	
	0	QD	0	0
	.47		0.04	0.08
	1		0.09	0.18
	2.2		0.2	0.4
	4.7		0.4	0.8
	10		0.9	1.8



#### SCHEMATIC

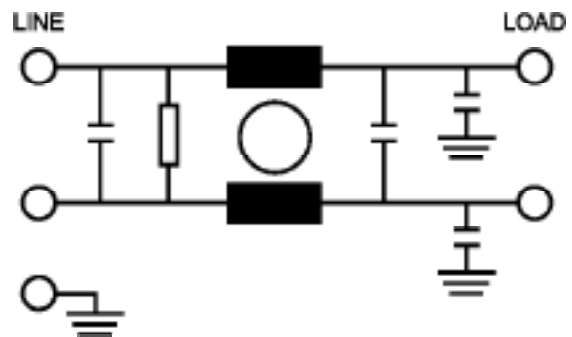

#### MECHANICAL

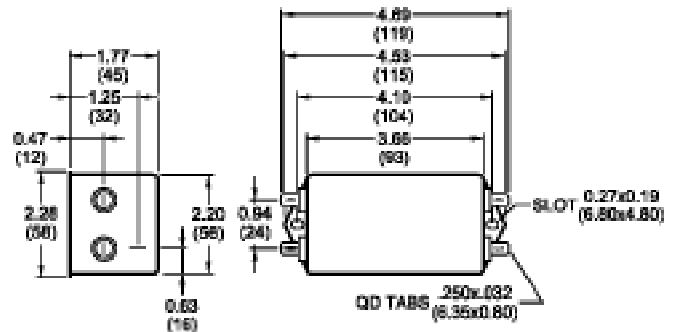

TYPICAL TOLERANCE: +/-0.02 (0.50)

Reference purposes only.  
Specifications are subject to change.  
Consult factory to verify specifications.