

RPMC5014-63

MIL/COTS, Delta 480V Power Line Filter

**RPMC5014-63
MIL/COTS AT 63A
480V, DELTA**

ROHS COMPLIANT




SPECIFICATIONS

Operating Freq.	: 50/60Hz
Max. Operating Voltage	: 480VAC
Operating Current	: 63A
Ambient Temperature	: -25 to 50C
Hipot Rating (L-G)	: 2200VDC
Terminals	: 3/8-16 Studs
Typ. Weight, LBS (KG)	: 16.0 (7.3)


TYPICAL INSERTION LOSS, dB (50/50ohm)

FREQ (MHz)	.15	.5	1	10	30	100	300
CM(dB)	80	80	95	100	100	100	100

SCHEMATIC

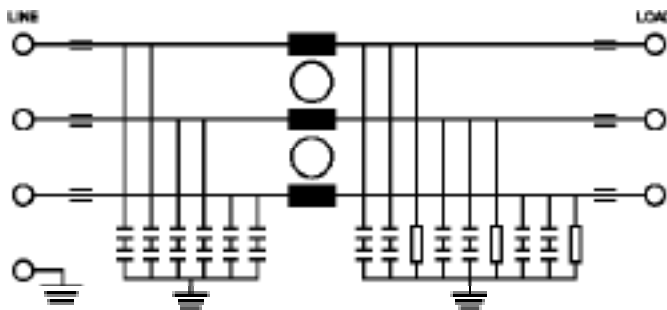

MECHANICAL

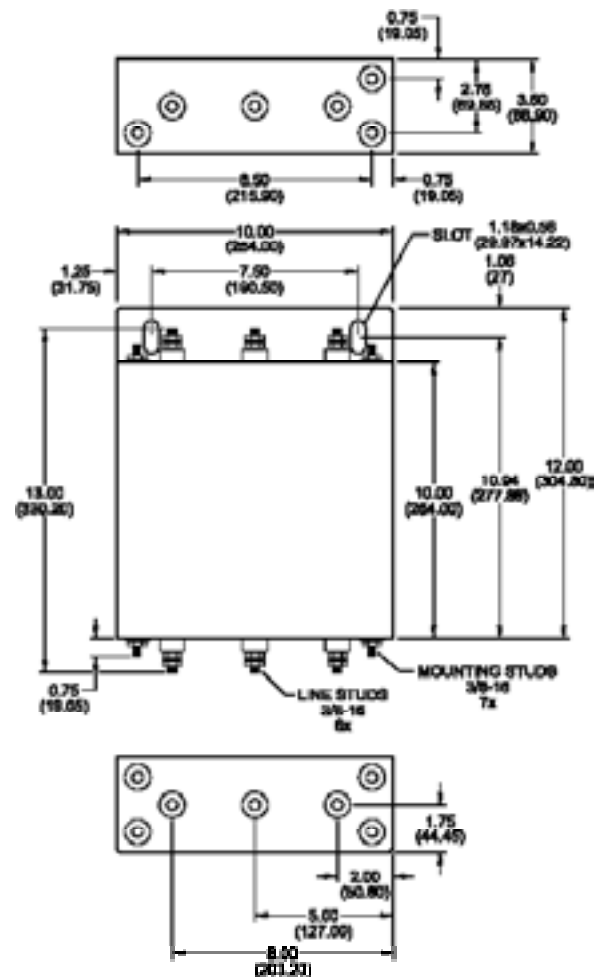

TYPICAL TOLERANCE: +/-0.02 (0.50)

Reference purposes only.
Specifications are subject to change.
Consult factory to verify specifications.

www.radiuspower.com
www.astrodyne.com

Email: Emifilters@astrodyne.com