

**700-075 Series Universal and Single Input 40VA Transformer**

**700-075 Series  
40VA  
CHASSIS MOUNT**

**ROHS COMPLIANT**



**Specifications**


- Operating Freq.:** 50/60Hz
- Input Voltage:** 120V/208V/240V
- Output Voltage:** 12V- 24VAC / 10-20VAC
- Ambient Temperature:** 40°C
- Efficiency:** >85%
- Regulation:** 12%
- Temp rise:** 75 Deg C Max at rated load
- Hipot Rating:** 2500VAC
- Terminals:** Lead wires (700-075-3 / -4)  
                  Tabs (700-075)
- Safety Approvals:** UL506 (700-075-3 / -4)  
                          UL1585 (700-075)  
                          CSA22.2No.66-98

**Part Number / Details**

MODEL/PN	VA	CLASS	OP, VAC
700-075	40	F	12-24
700-075-3	40	B	10-20
700-075-4	40	B	10-20


**Mechanicals**

- Overall:** 2.7(L) x 1.85(D) x 2.25(HT) IN  
(D is depth including bobbin)
- Mounting (A):** 3.145 IN
- Mounting Hole:** Slot, 0.20x0.25 IN, 2x




**Schematic**

**700-075**




**700-075-3**

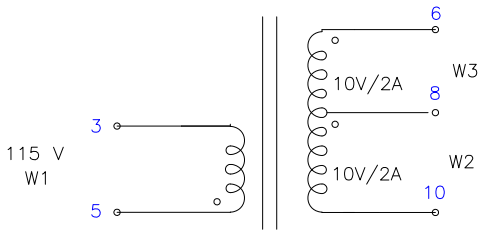

**700-075-4**

Dimensions shown for reference only.  
Specifications subject to change.

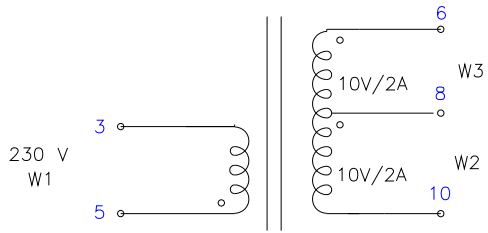

Dimensions shown for reference only.  
Specifications subject to change.

**RADIUS POWER**  
Standard & Custom Products

www.radiuspower.com  
PH 714-289-0055  
FAX 714-289-214