


TOROID FERRITE CORES

| TYPE | DIMENSIONS (mm) | | | EFFECTIVE PARAMETERS | | | WT (gm) | AL (nh) +/-30% | | | | |
|---------|-----------------------|----------------------|-----------------------|----------------------|-----------------------|-----------------------|---------|----------------|-------|------|------|-------|
| | A | B | C | Le (mm) | Ae (mm ²) | Ve (mm ³) | | RP97 | RP90 | RP38 | RP01 | RP95 |
| T 15219 | 152 ₊₅ | 104 _{+3.6} | 19 _{+0.5} | 393 | 451.5 | 177651 | 890 | 9400 | 7200 | 3700 | | 6200 |
| T 10215 | 102 ₊₂ | 65.8 _{+1.3} | 15 _{+0.5} | 255.3 | 262.7 | 67067 | 330 | 9200 | 7200 | 2700 | | 6400 |
| T 10020 | 100 ₊₃ | 55 _{+1.5} | 20 _{+0.6} | 229.6 | 436.8 | 10028 | 465 | 14300 | 12200 | 5000 | | 11400 |
| T 8714 | 87.4 _{+1.35} | 54 ₊₁ | 13.8 _{+0.45} | 213.8 | 226.1 | 48320 | 242 | 8800 | 7700 | 2700 | | 6600 |
| T 8530 | 85 _{+1.5} | 62 _{+1.5} | 30 ₊₁ | 227 | 342 | 77710 | 360 | 13200 | | 4000 | | 9300 |
| T 8520 | 85 _{+1.5} | 62 _{+1.5} | 20 ₊₁ | 230 | 228 | 52620 | 240 | 8970 | | 2600 | | 6210 |
| T 8015 | 80 _{+1.5} | 40 _{+1.2} | 15 _{+0.5} | 174 | 288 | 50219 | 270 | 14400 | 12480 | 4400 | | 10300 |
| T 7313 | 73.7 _{+1.5} | 38.9 _{+0.8} | 12.7 _{+0.5} | 165.4 | 213.6 | 35328 | 177 | 10800 | | 3400 | 4900 | 8100 |
| T 6325 | 63 _{+1.3} | 38 _{+0.8} | 25 _{+0.5} | 152 | 306 | 46528 | 236 | 17600 | | 5300 | 7400 | 12600 |
| T 6313 | 63 _{±1.3} | 38 _{±0.8} | 12.7 _{±0.3} | 152.8 | 155.4 | 23636 | 122 | 8900 | | 2650 | 3850 | 6400 |
| T 5818 | 58.3 _{±1} | 40.8 _{±0.8} | 17.6 _{±0.5} | 152.4 | 146.3 | 22296 | 110 | 8400 | | 2500 | 3600 | 6000 |
| T 5032 | 50 _{±1} | 34 _{±0.8} | 31.8 _{±0.5} | 128.7 | 253 | 32550 | 158 | 16100 | | | 7400 | 12200 |
| T 4919 | 49 _{±1} | 31.8 _{±0.7} | 19 _{±0.5} | 123 | 161 | 19796 | 100 | 11500 | | 3450 | 4950 | 8200 |
| T 3821 | 38 _{±1} | 19 _{±0.7} | 21 _{±0.5} | 82.8 | 192.7 | 15960 | 78 | 17200 | | | 8700 | 12300 |

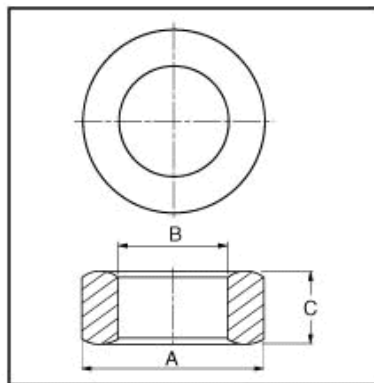

Dimensions are shown for reference only.
Specifications subject to change.

RADIUS POWER
Standard & Custom Products

www.radiuspower.com
PH 714-289-0055
FAX 714-289-2149